

Half-title page, prepared by publisher

Publishers' page

Full title page, prepared by publisher

Copyright page, prepared by publisher

Dedication Page
(optional)

Preface

The primary motivation for adaptive memory programming, therefore, is to group and unify all these emerging optimization techniques for enhancement of the computational capabilities that they offer to combinatorial problems which are encountered in real life in the area of production planning and control.

We confront this pitfall technically, by introducing explicit remarks about the generality of results at appropriate places; methodologically, by accumulating enough applications for every major idea to make its validity and generality stand out; and philosophically, observing that physics moves forward most of its ideas by analogies to cleverly chosen simple systems for which profound intuitions have been formed.

Special attention has also been paid to the wave-current interaction problems. Several models are evaluated by comparing the numerical results with laboratory data. It is quite clear that these higher-order modified equations are adequate for modeling the wave propagation from deep water to shallow water. However, to apply these models in the surf zone further study of breaking waves and the proper parameterization of wave breaking processes are essential.

One of most surprising findings is coastal engineering research in the last two decades is the robustness of the shallow-water equation models in calculating the wave runup in swash zone. Although the wave breaking process is usually not considered in the shallow-water equations, with a proper tuning of the numerical dissipation as well as the bottom friction, these models can predict the time history of runup heights for various types of incident waves with impressive accuracy. These models have also been extended to examine the interactions between water waves and coastal structures, which are either impermeable or protected by a layer.

The second order wave theory must be employed to include the effects of wave drift forces and springing since they are caused by the quadratic nonlinearity. To consider ringing and wave slamming, cubic nonlinearity and higher order nonlinearity must be included in the formulation.

The factors which have contributed most towards this are the growth of the uranium industry, the acceptance of solvent extraction as a process suitable for industrial use on a large scale, the development of techniques of leaching and reduction at temperatures up to 240°C at moderate pressures, and the demand for numerous less-common metals and other elements.

To model wave slamming and ringing as mentioned above and other nonlinear phenomenon, it is necessary to undertake fully nonlinear transient analyses, usually involving numerical time marching. At present many such numerical models exist. One of common difficulties faced by these models is the procedure to track the location of free surface, especially in the case of wave breaking. Different applications associated with each method, especially in wave hydrodynamics are discussed. More than one hundred references are cited in the paper.

T. M. Chan

Contents

<i>Preface</i>	vii
1. Typesetting a Book in L ^A T _E X2e Using the WSPC Book Style	1
1.1 Introduction	1
1.2 Using Other Packages	1
1.3 Input Used to Produce This Paper	2
1.4 Layout	3
1.5 Master File	3
1.6 Subdocuments	3
1.6.1 Parts	3
1.6.2 Chapters	3
1.6.3 Sectional Units	4
1.7 Major Headings	4
1.7.1 Subheadings	4
1.8 Lists of Items	5
1.8.1 Numbered and lettered lists	5
1.8.2 Bulleted and unnumbered lists	5
1.9 Mathematical Formulas	6
1.10 Floats	7
1.10.1 Tables	7
1.10.2 Figures	9
1.11 Proofs	14
1.12 Theorems and Definitions	14
1.13 Cross-referencing	16
1.14 Citations	17
1.14.1 Harvard Style	17

1.14.2	Vancouver Style	18
1.15	Footnote	19
1.16	Running Heads	19
1.17	Miscellaneous	19
1.17.1	Quote	19
1.18	Acknowledgments and Appendices	19
1.19	Appendices	20
1.20	Bibliography	20
1.20.1	BiBTeX users	20
1.20.2	Non-BiBTeX users	20
1.21	Index	21
2.	BIBTeXing Using the WSPC BIBStyle	23
2.1	BIBTeX Database Entries	23
2.2	BIBTeX	23
3.	Indexing	25
3.1	Indexing	25
3.2	Multiple Indexes	26
Appendix A	Appendix	27
A.1	Appendices	27
	<i>Bibliography</i>	29
	<i>Index</i>	31

Chapter 1

Typesetting a Book in L^AT_EX2_ε Using the WSPC Book Style

1.1 Introduction

This article explains how to use World Scientific's ws-book9x6 Document Class written in L^AT_EX2_ε. Authors who use this system correctly should find that writing their books is comparatively easy, since the output will be in a form directly suitable for camera-ready copy. In addition, the book will be produced quicker, automatically fitting the in-house style by default. The article itself was typeset using `ws-book9x6.cls`. You can obtain these files from our web pages at: <http://www.worldscientific.com/page/authors/book-stylefiles> and <http://www.icpress.co.uk/authors/stylefiles.shtml#books>.

1.2 Using Other Packages

The class file loads the packages `amsmath`, `amsfonts`, `amssymb`, `graphicx`, `rotating`, `makeidx` at startup.

Please try to limit your use of additional packages as they frequently introduce incompatibilities. This problem is not specific to the WSPC styles; it is a general L^AT_EX problem. Check this manual to see whether the required functionality is already provided by the WSPC class file. If you do need third-party packages, ensure that you send them along with the book. In general, you should use standard L^AT_EX commands as much as possible.

User-defined macros should be placed in the preamble of the chapter, and not at any other place in the document. Definitions made using the commands `\newcommand`, `\renewcommand`, `\newenvironment` or `\renewenvironment` should be used with great care. Restricted usage of such definitions is encouraged. Large macro packages and definitions that

are not used in the book should be avoided. Do not change existing environments, commands and other standard parts of L^AT_EX.

1.3 Input Used to Produce This Paper

An example of a master file for a book with 3 chapters and an appendix might be:

```
\documentclass{ws-book9x6}
\usepackage{ws-book-thm}
\usepackage{ws-book-har}

\title{My Book Title}

\makeindex

\begin{document}

\titlepages
\begin{dedication}
\large Dedication Page (optional)
\end{dedication}

\input preface.tex

\tableofcontents

\setcounter{page}{1}
\input chapter1.tex
\input chapter2.tex
\input chapter3.tex
\input appendix.tex

\bibliographystyle{ws-book-har}
\bibliography{ws-book-sample}
%\input bibliography.tex

\printindex
\end{document}
```

1.4 Layout

In order to facilitate our processing of your book, please give easily identifiable structure to the various parts of the text by making use of the usual L^AT_EX commands or by your own commands defined in the preamble, rather than by using explicit layout commands, such as `\hspace`, `\vspace`, `\large`, `\centering`, etc. Also, do not redefine the page-layout parameters.

1.5 Master File

Chapters should be written in separate files rather than creating one long file. The complete book should be run from a master file which in turn calls all chapters or allows chapters that can be processed selectively using the `\input` command. Instructions for the preparation of the book, including notes on preparing text which comprises Parts; Chapters; Section headings; Lists; Floats that include Tables and Figures; Mathematics; and References are discussed in this chapter.

1.6 Subdocuments

1.6.1 *Parts*

The interior of a book usually comprises three major divisions: the *front matter*; the *text*; and the *back matter*. The three main divisions in turn, may comprise several parts. Each part (or chapters in the part) may be written by a single author or by several authors contributing to a volume. A part is then further subdivided into chapters and sections. A part heading always occurs on a right-hand, odd-numbered page (recto). It is mandatory to leave the following page blank. The part heading should be included in the file for the chapter following it. Care should be taken while setting the style file to avoid the running head on the blank page. The part title should be set in boldface. An example of the code for a part title “My Part Title” is `\part{My Part Title}`.

1.6.2 *Chapters*

Each chapter should normally be in a separate file. The chapter title is typeset by using the `\chapter[#1]{#2}` command, where `[#1]` is an optional short title to be used as a running head if the title is too long and `#2`

is the full title of the chapter. The short, edited version of the title appears in the table of contents and running head. The chapter title should be typed in a way such that only the initial character is in upper case and the rest is in lower case.

1.6.3 *Sectional Units*

Section headings may be numbered or unnumbered depending on user preference. Sectional units are done in the usual way, i.e. with the L^AT_EX instructions `\section`, `\subsection`, `\subsubsection`, `\paragraph` and `\section*`.

1.7 Major Headings

To get numbered section headings, the `\section[#1]{#2}` command is used. If the full version of the heading is too long to be used in the running head or contents, an edited short-form can be added in square brackets before the full title. Major headings should be typeset in boldface, with the first letter of important words capitalized.

1.7.1 *Subheadings*

Subheadings are created with `\subsection{#1}`. Subheadings should be typeset in bold italics, with the first letter of the first word capitalized and the section number in boldface.

1.7.1.1 *Sub-subheadings*

To get numbered sub-subsection headings, the `\subsubsection{#1}` command is used. Typeset in italics (section number in roman) and capitalize the first letter of the first word only.

Paragraph Para heads are created with `\paragraph{#1}`.

Unnumbered Section

This section is not numbered, and would not get listed in table of contents. Unnumbered sections are created with `\section*{#1}`.

1.8 Lists of Items

Lists are broadly classified into four major categories, which can be used as desired by the author:

- (a) Numbered list.
- (b) Lettered list.
- (c) Unnumbered list.
- (d) Bulleted list.

1.8.1 *Numbered and lettered lists*

- (1) The `\begin{arabiclist}[]` command is used for the arabic number list (arabic numbers appearing within parenthesis), e.g., (1), (2), etc.
- (2) The `\begin{romanlist}[]` command is used for the roman number list (roman numbers appearing within parenthesis), e.g., (i), (ii), etc.
- (3) The `\begin{Romanlist}[]` command is used for the capital roman number list (capital roman numbers appearing within parenthesis), e.g., (I), (II), etc.
- (4) The `\begin{alphalist}[]` command is used for the alphabetical list (alphabetical characters appearing within parenthesis), e.g., (a), (b), etc.
- (5) The `\begin{Alphalist}[]` command is used for the capital alphabetical list (capital alphabetical characters appearing within parenthesis), e.g., (A), (B), etc.

Note: For all the above-mentioned lists, it is obligatory to enter the last entry's number in the list within the square bracket, to enable unit alignment.

Items numbered with lowercase Roman numerals:

- (i) item one
- (ii) item two
 - (a) lists within lists can be numbered with lowercase Roman letters
 - (b) second item.

1.8.2 *Bulleted and unnumbered lists*

The `\begin{itemlist}` command is used for the bulleted list.

The `\begin{unnumlist}` command is used for creating the unnumbered list with the turnovers hanging by 1 pica.

Lists may be laid out with each item marked by a dot:

- item one
- item two.

1.9 Mathematical Formulas

Inline: For in-line formulas use `\(... \)` or `$... $`. Avoid built-up constructions, such as fractions and matrices, in in-line formulas. In-line fractions can be typed with a solidus, e.g., `x+y/z=0`.

Displayed: For numbered displayed formulas use the `equation` environment `\begin{equation} ... \end{equation}`. And for unnumbered displayed formulas use `[...]`. For numbered displayed one-line formulas always use the `equation` environment. Do not use `$$... $$`. For example, the input for:

$$\mu(n, t) = \frac{\sum_{i=1}^{\infty} 1(d_i < t, N(d_i) = n)}{\int_{\sigma=0}^t 1(N(\sigma) = n) d\sigma} . \quad (1.1)$$

is

```
\begin{equation}
\mu(n, t)=\frac{\sum\limits^{\infty}_{i=1}1(d_i<t, N(d_i)=n)}
{\int\limits^t_{\sigma=0}1 (N(\sigma)=n)d\sigma}\,,
\label{eq1.1}
\end{equation}
```

For displayed multi-line formulas use the `eqnarray` environment. For example,

```
\begin{eqnarray}
\zeta\mapsto\hat{\zeta}&=&a\zeta+b\eta\label{eq1.2}\\
\eta\mapsto\hat{\eta}&=&c\zeta+d\eta\label{eq1.3}
\end{eqnarray}
```


produces

$$\zeta \mapsto \hat{\zeta} = a\zeta + b\eta \quad (1.2)$$

$$\eta \mapsto \hat{\eta} = c\zeta + d\eta \quad (1.3)$$

Superscripts and subscripts that are words or abbreviations, as in π_{low} , should be typed as roman letters; this is done as `\(\pi_{\mathrm{low}} \)` instead of π_{low} done by `\(\pi_{low} \)`.

For geometric functions, e.g., exp, sin, cos, tan, use the macros `\exp`, `\sin`, `\cos`, `\tan`. These macros give proper spacing in mathematical formulas.

1.10 Floats

Put tables and figures in the text with the table and figure environments, and position them near the first reference of the table or figure in the text. Do not put them at the end of the chapter.

1.10.1 Tables

Tables are numbered serially within each chapter following the corresponding chapter number and referred to in the text by number (Table 1.1, etc, **not** Tab. 1.1). Each table should have an explanatory caption, which should be as concise as possible. If a table is divided into parts, they should be labeled as (a), (b), (c), etc., but there should only be one caption for the whole table, and seldom separate ones for each part.

```
\begin{table}[t]
\tbl{Sample table caption.}
{\begin{tabular}{@{}cccc@{}} \toprule
Piston mass$^{\text{a}}$ & Analytical ...\\
& (Rad/s) & (Rad/s) \\ \colrule
1.0... \\
0.001... \\ \botrule
\end{tabular}}
\begin{tabnote}
$^{\text{a}}$Sample table footnote.
\end{tabnote}
\label{tbl1.1}
\end{table}
```

Table 1.1 Sample table caption.

Piston mass ^a	Analytical frequency (Rad/s)	TRIA6- S_1 model (Rad/s)	% Error ^b
1.000	281.0	280.81	0.07
0.100	876.0	875.74	0.03
0.010	2441.0	2441.00	0.00
0.001	4130.0	4129.30	0.16

^aSample table footnote.^bAnother sample table footnote.

By using the `\tbl` command in the `table` environment, long captions will be justified to the table width while short or single-line captions will be centered: `\tbl{table caption}{tabular environment}`.

If we need a fixed width for the tables, the command is `\begin{tabular*}{#1}{@{}l@{}}l@{}}` and `\end{tabular*}`. In the argument `#1`, the width of the table has to be given. For example, if we need the table to be of 25pc width, then the command is `\begin{tabular*}{25pc}{@{\extracolsep{fill}}l@{}}`.

Headings which span more than one column should be set using `\multicolumn{#1}{#2}{#3}`, where `#1` is the number of columns to be spanned, and `#2` is the argument for the alignment of the column head which may be either `c` — for center alignment; `l` — for left alignment; or `r` — for right alignment, as desired. Use `c` for column heads as this is the WS style. `#3` is the argument for the heading. A simplified alternative version is `\centre{#1}{#2}`, where `#1` is the number of columns to be spanned and `#2` the heading. There should be a rule spanning the same columns below the heading. Termed a spanner or bridge rule, it is generated using the command `\cline{n-m}`, where `n` is the number of the first spanned column and `m` that of the last spanned column. `\cline` should not be part of a row but follow immediately after a `\\`.

If a table contains notes, as a universal thumb-rule they should appear beneath the table set to its width and seldom at the foot of the page. For footnotes in the table environment, the command is `{\begin{tabnote}<text>\end{tabnote}}`. Appropriate symbols should be included in the body of the table matching their corresponding symbols in the footnotes where the footnotes are to be placed immediately after the `{\begin{tabnote}` command and terminated before the `\end{tabnote}}\end{table}` command.

For most tables, the horizontal rules are obtained by:

toprule one rule at the top

colrule one rule separating column heads from data cells

botrule one bottom rule

Hline one thick rule at the top and bottom of the tables with multiple column heads

To avoid the rules sticking out at either end of the table, add `@{}` before the first and after the last descriptors, e.g. `@lll@`. Please avoid vertical rules in tables. If you think the vertical rule is must, you can use the standard L^AT_EX `tabular` environment.

The tables are designed to have a uniform style throughout the whole book. WSPC prefers the border lines to be of the style as shown in our sample Tables. For the inner lines of the table, it looks better if they are kept to a minimum.

1.10.2 Figures

A figure is obtained with the following commands:

```
\begin{figure}[h]
\centerline{\includegraphics[width=4cm]{bk-fig1}}
\caption{Sample figure caption.}
\label{fig1.1}
\end{figure}
```




Fig. 1.1 Sample figure caption.

Adjust the scaling of the figure until it is correctly positioned, and remove the declarations of the lines and any anomalous spacing.

Here is an example of two figures appearing side-by-side:

```
\begin{figure}[ht]
\sidebyside
{
  \includegraphics[width=2in]{bk-fig2}
  \caption{Figure caption for left-side figure.}
  \label{fig1.2}
}{
  \includegraphics[width=2in]{bk-fig3}
  \caption{Figure caption for right-side figure.}
  \label{fig1.3}
}
\end{figure}
```

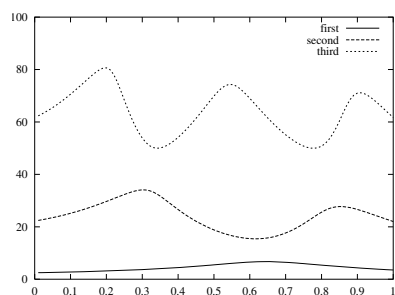


Fig. 1.2 Left-side figure caption.

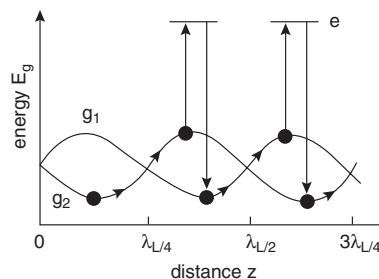


Fig. 1.3 Right-side figure caption.

Here is an example of two figures appearing side-by-side with single caption:

```
\begin{figure}[ht]
\sidebyside
{\includegraphics[width=1.8in]{bk-fig2}\\(a)}
{\includegraphics[width=1.8in]{bk-fig3}\\(b)}
\caption{Two figures side-by-side.
(a) Figure caption for left-side figure.
(b) Figure caption for right-side figure.}
\label{fig1.4}
\end{figure}
```

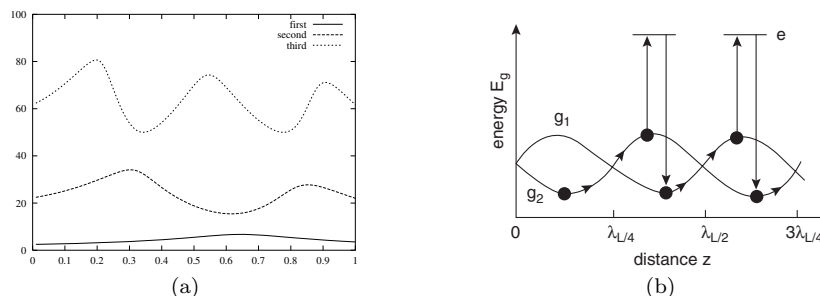


Fig. 1.4 Two figures side-by-side. (a) Figure caption for left-side figure. (b) Figure caption for right-side figure.

Side-by-side figures Fig. 1.4(a) and Fig. 1.4(b) are referred with `Fig.~\ref{fig1.4}(a)` and `\fref{fig1.4}(b)` commands.

If instead you wish to use some other method, then it is very important to leave the right amount of vertical space in the figure declaration to accommodate your figure.

The preferred graphics formats are tiff and Encapsulated PostScript (eps), for any type of image. The WSPC T_EX installation requires eps, but we can easily convert tiff to eps. Many other formats, e.g. pict (Macintosh), wmf (Windows) and various proprietary formats, are not suitable. Even if we can read such files, there is no guarantee that they will look the same on our systems as on yours.

Very large figures and tables should be placed on a page by themselves. Landscape tables and figures can be typeset with following environments:

- `sidewaystable` and
- `sidewaysfigure`.

Example:

```
\begin{sidewaysfigure}
\begin{center}
\includegraphics[height=4in]{bk-fig4}
\end{center}
\caption{Sample figure caption.}
\label{fig1.5}
\end{sidewaysfigure}
```

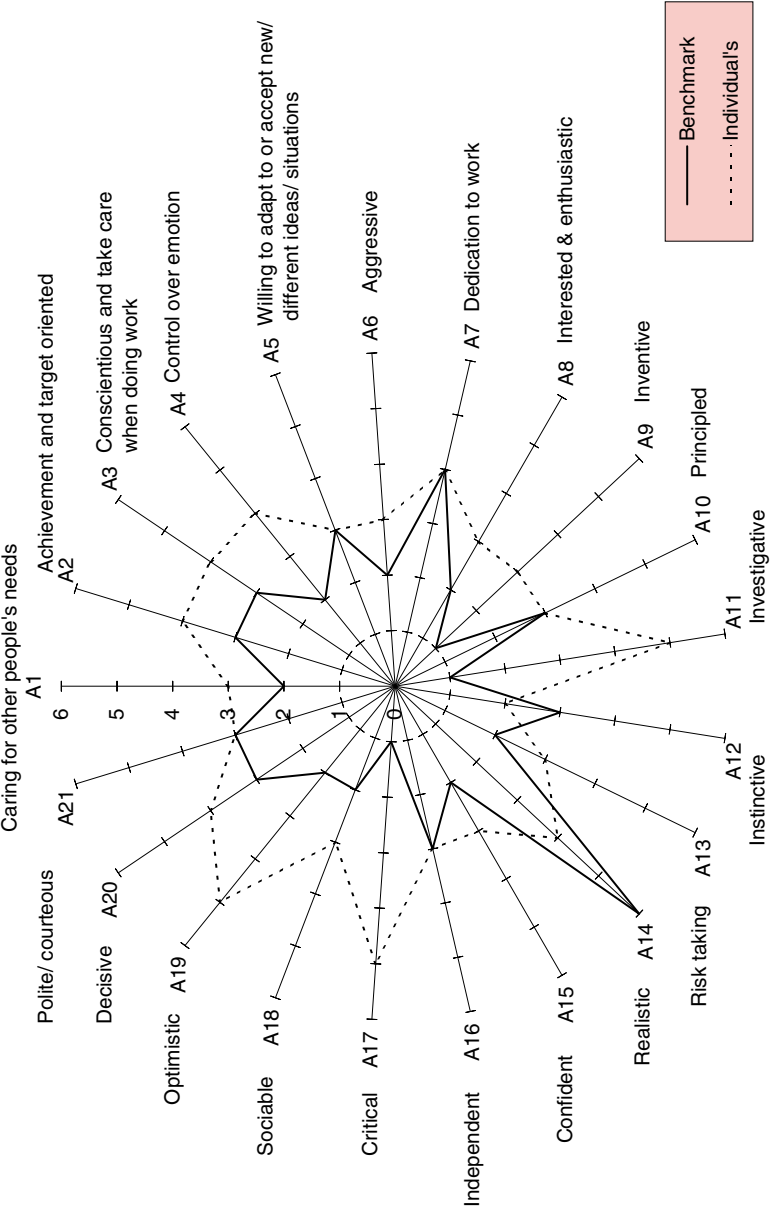


Fig. 1.5 Landscape figure.

Table 1.2 Landscape table.

f_0	λ_0	α_0	Positive roots (X_0)									
			4D	5D	6D	7D	8D	10D	12D	16D		
-0.033	0.034	0.1	6.75507	4.32936	3.15991	2.44524	1.92883	0.669541	—	—		
			1.14476	1.16321	1.1879	1.22434	1.29065	0.415056				
-0.1	0.333	0.2	3.15662	1.72737	—	—	—	—	—	—		
			1.24003	1.48602								
-0.301	0.302	0.001	2.07773	—	—	—	—	—	—	—		
			1.65625									
-0.5	0.51	0.001	—	—	—	—	—	—	—	—		
0.1	0.1	2	1.667	1.1946	—	—	—	—	—	—		
			0.806578	0.858211								
0.1	0.1	10	0.463679	0.465426	0.466489	0.466499	0.464947	0.45438	0.429651	0.35278		
0.1	1	0.2	—	—	—	—	—	—	—	—		
0.1	5	5	—	—	—	—	—	—	—	—		
1	0.001	2	0.996033	0.968869	0.91379	0.848544	0.783787	0.669541	0.577489	—		
			0.414324	0.41436	0.414412	0.414489	0.414605	0.415056	0.416214	—		
	0.001	0.2	0.316014	0.309739	—	—	—	—	—	—		
			0.275327	0.275856								
	0.1	5	0.089435	0.089441	0.089435	0.089409	0.08935	0.089061	0.088347	0.084352		
1	1	3	0.128192	0.128966	0.19718	0.169063	0.142103	—	—	—		
					0.41436	0.414412	0.414489					

1.11 Proofs

The WSPC document styles also provide a pre-defined proof environment for proofs. The proof environment produces the heading ‘Proof’ with appropriate spacing and punctuation. A ‘Q.E.D.’ symbol, \square , can be appended at the end of a proof with the command `\qed.`, e.g.

```
\begin{proof}
This is a test.
\end{proof}
```

to produce

Proof. This is a test. \square

If you want to display, ‘Proof of Lemma’, then write

```
\begin{proof}[Proof of Lemma]
This is a test.
\end{proof}
```

to produce

Proof of Lemma. This is a test. \square

1.12 Theorems and Definitions

The WSPC document styles contain a set of pre-defined environments for theorems, definitions, proofs, remarks etc., e.g.

All theorem-like objects use individual numbering scheme by default. To number them in a single sequence, load the class option `onethmnum` in the preamble., e.g., `\documentclass[onethmnum]{ws-book9x6}`.

```
\begin{theorem}
We have  $\# H^2(M \supset N) < \infty$  for an inclusion ...
\end{theorem}
```

produces

Theorem 1.1. *We have $\# H^2(M \supset N) < \infty$ for an inclusion $M \supset N$ of factors of finite index.*


```

\begin{theorem}[Longo, 1998]
For a given  $Q$ -system...
\[
N = \{x \in N; Tx = \gamma(x)T, Tx^* = \gamma(x^*)T\},
\]
and  $E_{\Xi}(\cdot) = T^* \gamma(\cdot)T$  gives a conditional
expectation onto  $N$ .
\end{theorem}

```

generates

Theorem 1.2 (Longo, 1998). *For a given Q -system...*

$$N = \{x \in N; Tx = \gamma(x)T, Tx^* = \gamma(x^*)T\},$$

and $E_{\Xi}(\cdot) = T^ \gamma(\cdot)T$ gives a conditional expectation onto N .*

The following environments are available by default with **ws-book-thm** package:

Environment	Heading	Body text
answer	Answer	upright text
assertion	Assertion	<i>italic text</i>
assumption	Assumption	upright text
axiom	Axiom	upright text
case	Case	upright text
claim	Claim	upright text
comment	Comment	upright text
conclusion	Conclusion	upright text
condition	Condition	upright text
conjecture	Conjecture	<i>italic text</i>
convention	Convention	upright text
corollary	Corollary	<i>italic text</i>
criterion	Criterion	<i>italic text</i>
definition	Definition	upright text
example	Example	upright text
hypothesis	Hypothesis	upright text
lemma	Lemma	<i>italic text</i>
notation	Notation	upright text
note	Note	upright text
observation	Observation	upright text
problem	Problem	upright text
property	Property	upright text
proposition	Proposition	<i>italic text</i>
remark	Remark	upright text
summary	Summary	upright text
theorem	Theorem	<i>italic text</i>

L^AT_EX provides `\newtheorem` to create new theorem environments. To add a new theorem-type environment to a chapter, use

```
\newtheorem{question}{Question}[chapter]
\let\Questionfont\upshape
\def\Questionheadfont{\bfseries}
```

For additional features on theorems, exercises / questions and solutions, check the `extras` folder.

1.13 Cross-referencing

Use `\label` and `\ref` for cross-referencing to equations, figures, tables, sections, subsections, etc., instead of plain numbers. Every numbered part to which one wants to refer should be labelled with the instruction `\label`, e.g.

```
\begin{equation}
\mu(n, t) = \frac{\sum \limits^{\infty}_{i=1} 1 \dots}
\label{eq1.1}
\end{equation}
```

With the instruction `\ref` one can refer to a numbered part that has been labelled, e.g. ..., see also Eq. (`\ref{eq1.1}`).

Some useful shortcut commands.

Shortcut command	Equivalent T _E X command	Output
In the middle of a sentence:		
<code>\eref{eq1.1}</code>	Eq. (<code>\ref{eq1.1}</code>)	Eq. (1.1)
<code>\sref{sec1.1}</code>	Sec. <code>\ref{sec1.1}</code>	Sec. 1.1
<code>\cref{ch1}</code>	Chap. <code>\ref{ch1}</code>	Chap. 1
<code>\fref{fig1.1}</code>	Fig. <code>\ref{fig1.1}</code>	Fig. 1.1
<code>\tref{tbl1.1}</code>	Table <code>\ref{tbl1.1}</code>	Table 1.1
At the starting of a sentence:		
<code>\Eref{eq1.1}</code>	Equation (<code>\ref{eq1.1}</code>)	Equation (1.1)
<code>\Sref{sec1.1}</code>	Section <code>\ref{sec1.1}</code>	Section 1.1
<code>\Cref{ch1}</code>	Chapter <code>\ref{ch1}</code>	Chapter 1
<code>\Fref{fig1.1}</code>	Figure <code>\ref{fig1.1}</code>	Figure 1.1
<code>\Tref{tbl1.1}</code>	Table <code>\ref{tbl1.1}</code>	Table 1.1

- labels should not be repeated.

- The `\label` instruction should be typed immediately after (or one line below), but not inside the argument of a number-generating instruction such as `\section` or `\caption`, e.g.

```
\caption{ ... caption ... }\label{fig1.1}
```

1.14 Citations

World Scientific's preferred style for books is the Harvard (author-date) system, unless the text is very heavily referenced in which case the Vancouver (numbered) system may be more appropriate.

System	Package
Harvard (author-date)	<code>\usepackage{ws-book-har}</code>
Vancouver (numbered)	
• Bracketed [1]	<code>\usepackage{ws-book-van}</code>
• Superscript ¹	<code>\usepackage[super]{ws-book-van}</code>

1.14.1 Harvard Style

Use `\bibitem` to produce the bibliography. Citations in the text use the labels defined in the `\bibitem` declaration, for example, the first paper by [Jarlskog (1988)] is cited using the command `\cite{jarl88}`. The `\bibitem` labels should not be repeated.

Basic citation commands available with the `ws-book-har` package:

<code>\citeauthor{weis94}</code>	⇒ Weiss
<code>\citeyear{weis94}</code>	⇒ 1994
<code>\cite{weis94}</code>	⇒ [Weiss (1994)]
<code>\cite[Chap. 1]{weis94}</code>	⇒ [Weiss (1994), Chap. 1]
<code>\citet{weis94}</code>	⇒ Weiss (1994)
<code>\citep{weis94}</code>	⇒ (Weiss, 1994)
<code>\citep[Chap. 1]{weis94}</code>	⇒ (Weiss, 1994, Chap. 1)
<code>\citep[see][]{weis94}</code>	⇒ (see Weiss, 1994)
<code>\citep[see][Chap. 1]{weis94}</code>	⇒ (see Weiss, 1994, Chap. 1)
<code>\cite{best03,chur90}</code>	⇒ [Bestbury (2003); Churchill and Brown (1990)]
<code>\citet{best03,chur90}</code>	⇒ Bestbury (2003); Churchill and Brown (1990)
<code>\citep{best03,chur90}</code>	⇒ (Bestbury, 2003; Churchill and Brown, 1990)

- For a single author, use 'Weiss (1994) ...' or '... [Weiss (1994)]'
- For multiple citations, do not use `\cite{chur90}\cite{weis94}`, but use `\cite{chur90,weis94}` instead.
- If there are two authors, use [Churchill and Brown (1990)] or (Churchill and Brown, 1990)

- Add a, b, c, etc. to distinguish between two or more references with the same author name and year (e.g., Roitt 1999a,b)

1.14.2 *Vancouver Style*

Reference citations in the text are to be numbered consecutively in Arabic numerals, in the order of first appearance. The numbered citations can appear in two ways:

- (i) bracketed
- (ii) superscript

1.14.2.1 *Bracketed*

References cited in the text are within square brackets, e.g.,

- (1) ‘‘One can deduce from Ref.~\cite{benh93} that...’’
‘‘One can deduce from Ref. [3] that...’’
- (2) ‘‘See Refs.~\cite{bake72,bene97,benh93,brow88} and \cite{davi93} for more details.’’
‘‘See Refs. [1–3, 5] and [7] for more details.’’

1.14.2.2 *Superscript*

References cited in the text appear as superscripts, e.g.,

- (1) ‘‘...in the statement.\cite{bake72}’’
‘‘...in the statement.¹’’
- (2) ‘‘...have proven\cite{bene97} that this equation...’’
‘‘...have proven² that this equation...’’

When the reference forms part of the sentence, it should appear with ‘‘Reference’’ or ‘‘Ref.’’, e.g.,

- (1) ‘‘One can deduce from Ref.~\refcite{benh93} that...’’
‘‘One can deduce from Ref. 3 that...’’
- (2) ‘‘See Refs.~\refcite{bake72}--\refcite{benh93}, \refcite{brow88} and \refcite{davi93} for more details.’’
‘‘See Refs. 1–3, 5 and 7 for more details.’’

1.15 Footnote

Footnotes are denoted by Arabic number superscript in the text, e.g.,

Usage:

```
... total.\footnote{Sample footnote text.}
```

Output:

... in total.¹

1.16 Running Heads

The WSPC prefers “Book Title” as even page header and “Chapter Title” as odd page header. However, authors can pick their required style by switching the class options while loading the **ws-book9x6** document class in the preamble.

Class options	Even page	Odd page
<code>\documentclass[acrhead]{ws-book9x6}</code> ^a	Author Name(s)	Chapter Title
<code>\documentclass[csrhead]{ws-book9x6}</code>	Chapter Title	Section Title
<code>\documentclass{ws-book9x6}</code>	Book Title	Chapter Title

^aAuthor names are included with `\author{A. Author}` in multi-authored books.

1.17 Miscellaneous

1.17.1 Quote

Here is an example for the `quote` environment.

This is an example for the `quote` environment. Quote text is indented by 1pc on the left and right sides. The point size for the quote text is 9/11pt.

1.18 Acknowledgments and Appendices

Acknowledgments to funding bodies, etc. may be placed in a separate section at the end of the text, before the appendices. This should not be numbered, so use `\section*{Acknowledgements}`.

¹Sample footnote text.

1.19 Appendices

Appendices should be used only when absolutely necessary. They should come before the bibliography. Appendix A of this document has more details on appendices.

1.20 Bibliography

1.20.1 *BIB_T_EX* users

BIB_T_EX users should use our bibliography style file `ws-book-har.bst` for (author-date) references or `ws-book-van.bst` for (numbered) references. Chapter 2 of this document has more on BIB_T_EX.

1.20.2 *Non-BIB_T_EX* users

Non-BIB_T_EX users can follow the reference pattern as shown below.

Here are some sample references coded in author-date model.

```
\begin{thebibliography}{9}
```

```
\bibitem[{Baker and Carter(1972)}]{bake72}
```

Baker, D.~W. and Carter, N.~L. (1972). *\emph{Seismic Velocity Anisotropy Calculated for Ultramafic Minerals and Aggregates}*, *\emph{Geophys. Mono.}*, Vol.~16 (Am. Geophys. Union), pp. 157--166.

```
\bibitem[{Benhamou and Colmerauer(1993)}]{benh93}
```

Benhamou, F. and Colmerauer, A. (eds.) (1993). *\emph{Constraint Logic Programming, Selected Research}* (MIT Press).

```
\bibitem[{Bestbury(2003)}]{best03}
```

Bestbury, B.~W. (2003). $\$R\$$ -matrices and the magic square, *\emph{J. Phys. A}* **\textbf{36}**, 7, pp. 1947--1959.

```
\bibitem[{Churchill and Brown(1990)}]{chur90}
```

Churchill, R.~V. and Brown, J.~W. (1990). *\emph{Complex Variables and Applications}*, 5th edn. (McGraw-Hill).

```
\end{thebibliography}
```

Here are some sample references coded in numbered model.

```
\begin{thebibliography}{9}

\bibitem{bake72}
D.~W. Baker and N.~L. Carter, \emph{Seismic Velocity Anisotropy
  Calculated for Ultramafic Minerals and Aggregates},
  \emph{Geophys. Mono.}, Vol.~16. Am. Geophys. Union,
  pp. 157--166 (1972).

\bibitem{benh93}
F.~Benhamou and A.~Colmerauer (eds.), \emph{Constraint Logic
  Programming, Selected Research}. MIT Press (1993).

\bibitem{best03}
B.~W. Bestbury,  $\mathbb{R}$ -matrices and the magic square,
  \emph{J. Phys. A} \textbf{36}, 7, pp. 1947--1959 (2003).

\bibitem{chur90}
R.~V. Churchill and J.~W. Brown, \emph{Complex
  Variables and Applications}, 5th edn. McGraw-Hill (1990).

\end{thebibliography}
```

The main difference between the codings of author-date references and numbered references is the argument of `\bibitem`.

Author-date	Numbered
<code>\bibitem[{Baker and Carter(1972)}]{bake72}...</code>	<code>\bibitem{bake72}...</code>
<code>\bibitem[{Bestbury(2003)}]{best03}...</code>	<code>\bibitem{best03}...</code>

1.21 Index

The index should be printed at the end of the book. Chapter 3 has more on indexing.

Chapter 2

BIB_TE_Xing Using the WSPC BIBStyle

2.1 BIB_TE_X Database Entries

BIB _T E _X Database entry type	Sample citation
article	[Bestbury (2003); Deligne and Gross (2002)] [Beneke <i>et al.</i> (1997); Hopfield and Herz (1995); Yuan (2014)]
proceedings	[Weiss (1994)]
inproceedings	[Gupta and Senturia (1997)]
book	[Richardson (1960); Jarlskog (1988)]
edition	[Churchill and Brown (1990)]
editor	[Benhamou and Colmerauer (1993)]
series	[Baker and Carter (1972)]
tech report	[Hobby (1992); Kernighan (1984)]
unpublished	[Heard <i>et al.</i> (1994)]
phd thesis	[Brown (1988)]
masters thesis	[Lodha (1974)]
incollection	[Jones (1973)]
misc	(Davidsen, 1993, Theorem 2.1)

2.2 BIB_TE_X

If you use the BIB_TE_X program to maintain your bibliography, you do not use the `thebibliography` environment. Instead, you should include the lines

```
\bibliographystyle{ws-book-har}
\bibliography{ws-book-sample}
```

where `ws-book-har` refers to a file `ws-book-har.bst`, which defines how your references will look.

The argument to `\bibliography` refers to the file `ws-book-sample.bib`, which should contain your database in `BIBTEX` format. Only the entries referred to via `\cite` will be listed in the bibliography.

To complete the job, compile your file as follows:

- (1) `latex ws-book9x6`
- (2) `latex ws-book9x6`
- (3) `bibtex ws-book9x6`
- (4) `makeindex ws-book9x6`
- (5) `latex ws-book9x6`
- (6) `latex ws-book9x6`

Chapter 3

Indexing

3.1 Indexing

The first step in producing the index is to put the necessary `\index` commands in your document. The following example shows some simple `\index` commands and the index entries that they produce.

Page ii:	<code>\index{Alpha}</code>	Alpha, ii
Page viii:	<code>\index{alpha}</code>	alpha, viii, ix, 22
Page ix:	<code>\index{alpha}</code>	bites
Page 7:	<code>\index{gnat!size of}</code>	animal
Page 8:	<code>\index{bites!animal!gnats}</code>	gnats, 8, 10
Page 10:	<code>\index{bites!animal!gnats}</code>	gnus, 10
Page 10:	<code>\index{bites!animal!gnus}</code>	vegetable, 12
Page 12:	<code>\index{bites!vegetable}</code>	gnat, 32
Page 22:	<code>\index{alpha}</code>	anatomy, 35
Page 32:	<code>\index{gnat}</code>	size of, 7
Page 35:	<code>\index{gnat!anatomy}</code>	gnus
	<code>\index{gnus!good}</code>	bad, 38
Page 38:	<code>\index{gnus!bad}</code>	good, 35

You then run `LATEX` on your entire document, causing it to generate the file `ws-book9x6.idx`. Next, run the `MakeIndex` program by typing the command, `makeindex ws-book9x6`. This produces the file `ws-book9x6.ind`. If `MakeIndex` generated no error messages, you can now rerun `LATEX` on your document and the index will appear.

Reading the index, you may discover mistakes, which should be corrected by changing the appropriate `\index` commands in the document

and regenerating the `ind` file. If there are problems that cannot be corrected in this way, you can edit the `ind` file directly. However, such editing is to be avoided because it must be repeated every time you generate a new version of the index.

If you would like to have “general” and “author” indexes separately, please see Sec. 3.2. For more details on index generation, see [Lamport (1987)].

3.2 Multiple Indexes

To create a “general” and an “author” index, include the following lines:

```
...
\usepackage{ws-multind}
\makeindex{general}
\makeindex{authors}
...
\index{authors}{Fairbairns, R.} % or \aindx{Fairbairns, R.}
...
\index{general}{FAQs}          % or \gindx{FAQs}
...
\printindex{general}{General Index}
\printindex{authors}{Author Index}
```

To complete the job, compile your file as follows:

- (1) `latex ws-book9x6`
- (2) `latex ws-book9x6`
- (3) `bibtex ws-book9x6` (for bibtex users)
- (4) `makeindex general`
- (5) `makeindex authors`
- (6) `latex ws-book9x6`
- (7) `latex ws-book9x6`

Appendix A

Appendix

A.1 Appendices

Appendices should be used only when absolutely necessary. They should come before the References.

Table A.1 Class options.^a

Option	Purpose	
	Even page headers	Odd page headers
acrhead	Author Name(s)	Chapter Title
csrhead	Chapter Title	Section Title
bcrhead default	Book Title	Chapter Title
onethmnum	To number all theorem-like objects in a single sequence, e.g. Theorem 1, Definition 2, Lemma 3, etc. Default: individual numbering on different theorem-like objects, e.g. Theorem 1, Definition 1, Lemma 1, etc.	
wsdraft	To draw border line around text area.	
bigtoc	To align the table of contents for those books with more than 9 Chapters	
openany	To start a chapter on the next page (even or odd). Default: starts a chapter on the right (odd pages)	

^aUsage: `\documentclass[option]{ws-book9x6}`

Sectional units are obtained in the usual way, i.e. with the L^AT_EX instructions `\section`, `\subsection`. If there is more than one appendix, number them alphabetically. Number displayed equations occurring in the Appendix in this way, e.g. (A.1), (A.2), etc.

$$k_{n+1} = n^2 + k_n^2 - k_{n-1} .$$

(A.1)

Table A.2 Commonly used macros.

Macro/Environment name	Purpose
<code>\chapter{#1}{#2}</code>	Chapter title
<code>\section{#1}</code>	Section heading
<code>\subsection{#1}</code>	Subsection heading
<code>\subsubsection{#1}</code>	Subsubsection heading
<code>\section*{#1}</code>	Unnumbered Section head
<code>\begin{itemlist}</code>	Start bulleted lists
<code>\end{itemlist}</code>	End bulleted lists
<code>\begin{arabiclist}</code>	Start arabic lists (1, 2, 3...)
<code>\end{arabiclist}</code>	End arabic lists
<code>\begin{romanlist}</code>	Start roman lists (i, ii, iii...)
<code>\end{romanlist}</code>	End roman lists
<code>\begin{Romanlist}</code>	Start roman lists (I, II, III...)
<code>\end{Romanlist}</code>	End roman lists
<code>\begin{alphalist}</code>	Start alpha lists (a, b, c...)
<code>\end{alphalist}</code>	End alpha lists
<code>\begin{Alphalist}</code>	Start alpha lists (A, B, C...)
<code>\end{Alphalist}</code>	End alpha lists
<code>\begin{proof}</code>	Start of Proof
<code>\end{proof}</code>	End of Proof
<code>\begin{theorem}</code>	Start of Theorem
<code>\end{theorem}</code>	End of Theorem (see Page 15 for detailed list)
<code>\begin{appendix}</code>	Start Appendix
<code>\end{appendix}</code>	End Appendix
<code>\begin{thebibliography}{#1}</code>	Start of reference list
<code>\end{thebibliography}</code>	End of reference list
<code>\bibitem[{#1}]{#2}</code>	reference item in author-date style
<code>\bibitem{#1}</code>	reference item in numbered style
<code>\bibliographystyle{#1}</code>	To include BIB _T _E _X style file
<code>\bibliography{#1}</code>	To include BIB _T _E _X database
<code>\blankpage</code>	for blank page with no running heads
Macros available for Tables/Figures.	
<code>figure</code>	figures
<code>sidewaysfigure</code>	landscape figures
<code>table</code>	tables
<code>sidewaystable</code>	landscape tables
<code>\tbl{#1}{#2}</code>	#1 - table caption; #2 - tabular environment
Horizontal Rules for tables	
<code>\toprule</code>	one rule at the top
<code>\colrule</code>	one rule separating column heads from data cells
<code>\botrule</code>	one bottom rule
<code>\Hline</code>	one thick rule at the top and bottom of the tables with multiple column heads

Bibliography

- Baker, D. W. and Carter, N. L. (1972). *Seismic Velocity Anisotropy Calculated for Ultramafic Minerals and Aggregates*, *Geophys. Mono.*, Vol. 16 (Am. Geophys. Union), pp. 157–166.
- Beneke, M., Buchalla, G., and Dunietz, I. (1997). Mixing induced CP asymmetries in inclusive B decays, *Phys. Lett.* **B393**, pp. 132–142, [arXiv:hep-ph/9609357](https://arxiv.org/abs/hep-ph/9609357).
- Benhamou, F. and Colmerauer, A. (eds.) (1993). *Constraint Logic Programming, Selected Research* (MIT Press).
- Bestbury, B. W. (2003). *R*-matrices and the magic square, *J. Phys. A* **36**, 7, pp. 1947–1959.
- Brown, M. E. (1988). *An Interactive Environment for Literate Programming*, Ph.D. thesis, Texas A&M University, TX, USA.
- Churchill, R. V. and Brown, J. W. (1990). *Complex Variables and Applications*, 5th edn. (McGraw-Hill).
- Davidsen, B. (1993). Netpbm, <ftp://ftp.wustl.edu/graphics/graphics/packages/NetPBM>.
- Deligne, P. X. and Gross, B. H. (2002). On the exceptional series, and its descendants, *C. R. Math. Acad. Sci. Paris* **335**, 11, pp. 877–881.
- Gupta, R. K. and Senturia, S. D. (1997). Pull-in time dynamics as a measure of absolute pressure, in *Proc. IEEE Int. Workshop on Microelectromechanical Systems (MEMS'97)* (Nagoya, Japan), pp. 290–294.
- Heard, H. C., Borg, I. V., Carter, N. L., and Raleigh, C. B. (1994). VoQS: Voice Quality Symbols, Revised to 1994.
- Hobby, J. D. (1992). A User's Manual for MetaPost, Tech. Rep. 162, AT&T Bell Laboratories, Murray Hill, New Jersey.
- Hopfield, J. J. and Herz, A. V. M. (1995). Rapid Local Synchronization of Action Potentials: Toward Computation with Coupled Integrate-and-Fire Neurons, *Proceedings of the National Academy of Sciences* **92**, 15, pp. 6655–6662, doi: 10.1073/pnas.92.15.6655, <http://www.pnas.org/cgi/content/abstract/92/15/6655>, <http://www.pnas.org/cgi/reprint/92/15/6655.pdf>.
- Jarlskog, C. (1988). *CP Violation* (World Scientific, Singapore).
- Jones, D. (1973). The term ‘phoneme’, in W. E. Jones and J. Laver (eds.), *Pho-*

- netics in Linguistics: A Book of Reading* (Longman, London), pp. 187–204.
- Kernighan, B. W. (1984). PIC—A graphics language for typesetting, Computing Science Technical Report 116, AT&T Bell Laboratories, Murray Hill, New Jersey.
- Lamport, L. (1987). *Make Index: An Index Processor For LaTeX*, <http://mirrors.ctan.org/indexing/makeindex/doc/makeindex.pdf>.
- Lodha, G. S. (1974). *Quantitative interpretation of airborne electromagnetic response for a spherical model*, Master's thesis, University of Toronto, Canada.
- Richardson, L. F. (1960). *Arms and Insecurity* (Boxwood, Pittsburg).
- Weiss, G. H. (ed.) (1994). *Contemporary Problems in Statistical Physics* (SIAM, Philadelphia).
- Yuan, C.-Z. (2014). Recent progress on the study of the charmoniumlike states, *Int. J. Mod. Phys. A***29**, p. 1430046, doi:10.1142/S0217751X14300464, [arXiv:1404.7768 \[hep-ex\]](#).

Index

- BIB_TE_X, 20, 23
- acknowledgments, 19
- appendix, 20, 27
- bibliography, 20
 - author-date, 20
 - numbered, 21
- citation, 17
 - author-date, 17
 - numbered, 18
 - bracketed, 18
 - superscript, 18
- equations
 - display, 6
 - inline, 6
- floats, 7
 - figures, 9
 - landscape, 12
 - tables, 7
 - landscape, 11
 - notes to, 8
 - rules, 9
- footnote, 19
- index, 21, 25
 - multiple indexes, 26
- lists, 5
 - bulleted and unnumbered, 5
 - numbered and lettered, 5
 - Alphabetical (A, B, C...), 5
 - alphabetical (a, b, c...), 5
 - arabic (1, 2, 3...), 5
 - Roman (I, II, III...), 5
 - roman (i, ii, iii...), 5
- master file, 3
- packages, 1
- quote, 19
- running head, 19
- subdocuments
 - chapters, 3
 - parts, 3
 - sectional units, 4
 - section, 4
 - subsection, 4
 - subsubsection, 4
 - unnumbered section, 4
- theorems, 14